



- 98 dB SPL 1W/ 1m average sensitivity
- 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
- 850 WAES power handling
- Carbon fiber reinforced cellulose cone
- Copper shorting ring for linear impedance and reduced distortion figure
- Double Demodulating Ring (DDR) for lower distortion
- Improved heat dissipation via unique basket design
- Weather protected cone and plates for outdoor usage
- Ideal for compact reflex enclosures, two-way systems and stage monitoring applications

The 15MB1000 is a 100mm (4 in) voice coil 380mm (15 in) diameter mid-low frequency transducer which has been created to meet requirements for low bass applications where a significant extension in mid frequency is needed. It has been designed for use in compact reflex enclosures, in two-way systems with 1.4" - 2" compression drivers and stage monitoring applications. 15MB1000 is also suitable for horn loaded applications in multiway systems. The low profile, carbon fiber reinforced, smooth curvilinear cone provides smooth response within its intended frequency range and exceptional strength with maximum reliability under high mechanical stress. The copper shorting ring on the plates has been adopted to reduce inductance and improve transient response. Intermodulation distortion has also been significantly improved. The low distortion and unmatched sound quality of the 15MB1000 has been significantly improved by the Double Demodulating Rings (DDR) embedded in the pole piece of the magnetic structure. These have been designed to dramatically reduce the intermodulation and harmonic distortion while improving the transient response. The 100mm aluminum voice coil employs the Interleaved Sandwich Voice coil (ISV) technology, in which a high strength fibreglas former carries windings on both the outer and inner surfaces to achieve a balanced coil with a uniform distribution of mass and motive energy. This results in an extremely linear motor assembly. Excellent heat dissipation has been achieved by incorporating air channels between the basket and the magnetic top plate. Further ventilation is provided using air vents in the back plate that direct air into the lower part of the voice coil gap. Considerable attention has also been given to the design of the magnetic structure in order to maximize flux concentration and force factor in the gap. Due to the increasing use of high power audio systems at outdoor events, the ability to perform in adverse weather conditions is a key feature of the 15MB1000. This has been achieved using an exclusive treatments which allows the cone and the magnetic plate to resist corrosion whilst also rendering the cone water repellent.

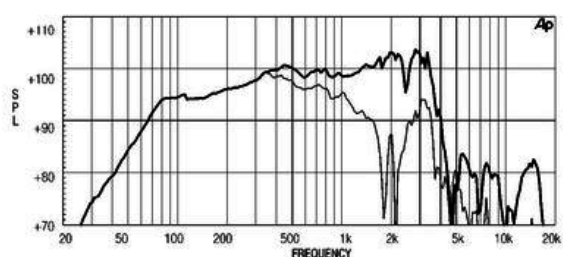

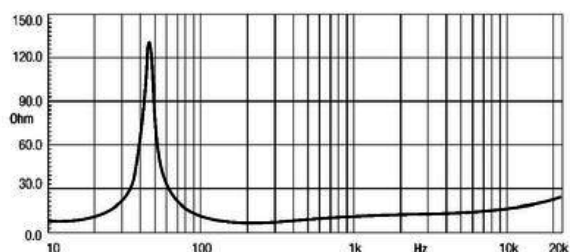

15MB1000 8Ω

LF drivers - 15.0 Inches

SPECIFICATIONS

| | |
|--|-----------------|
| Nominal Diameter | 380 mm (in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 6.0 Ω |
| Nominal Power Handling ¹ | 850 W |
| Continuous Power Handling ² | 1200 W |
| Sensitivity ³ | 98.0 dB |
| Frequency Range | 45 - 5100 Hz |
| Voice Coil Diameter | 100 mm (4.0 in) |
| Winding Material | aluminum |

PARAMETERS⁴

| | |
|---------------------|---|
| Resonance Frequency | 48 Hz |
| Re | 5.5 Ω |
| Qes | 0.32 |
| Qms | 6.0 |
| Qts | 0.31 |
| Vas | 132.5 dm ³ (4.68 ft ³) |
| Sd | 850.0 cm ² (131.75 in ²) |
| Xmax | 6.0 mm |
| Mms | 85.0 g |
| Bl | 21.0 Txm |
| Le | 1.5 mH |
| EBP | 150 Hz |

DESIGN

| | |
|------------------------|---|
| Surround Shape | Triple roll |
| Cone Shape | Curvilinear |
| Magnet Material | Ferrite |
| Woofers Cone Treatment | Weather protected |
| Recommended Enclosure | 100.0 dm ³ (3.53 ft ³) |
| Recommended Tuning | 55 Hz |

MOUNTING AND SHIPPING INFO

| | |
|-----------------------------|--|
| Overall Diameter | 387 mm (15.24 in) |
| Bolt Circle Diameter | 370 mm (14.57 in) |
| Baffle Cutout Diameter | 353.0 mm (13.9 in) |
| Depth | 156 mm (6.14 in) |
| Flange and Gasket Thickness | 19 mm (0.75 in) |
| Net Weight | 11.4 kg (25.13 lb) |
| Shipping Weight | 12.4 kg (27.34 lb) |
| Shipping Box | 405 x 405 x 214 mm (15.94x15.94x8.43 in) |

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.