



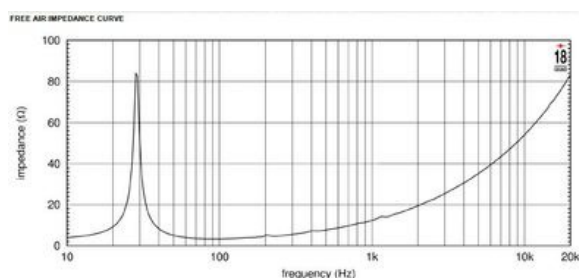

- 95 dB SPL 1W/ 1m average sensitivity
- 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
- 3200W program power handling
- 70 mm (2,76 in) peak to peak excursion
- Ultra linear dual magnet motor design
- Single Demodulating Ring (SDR) for lower distortion
- Composite reinforced straight ribbed cone
- Optimized high grade ferrite magnet assembly
- Recommended for subwoofer usage in compact vented enclosures

The 21LW2500 is a 21" (533 mm) extended low frequency loudspeaker, designed for use in vented enclosures. The loudspeaker is designed to withstand high power levels without damage while providing clean and undistorted LF reproduction at a very high SPL. For optimum results we recommend amplifiers able to deliver 3600 Watt program power. The 21LW2500 features a unique motor featuring a high grade ferrite magnet assembly in a structure optimized for thermal and magnetic efficiency. 21LW2500 features include a large displacement suspension system which, in conjunction with a composite reinforced, straight ribbed cone and the Eighteen Sound proprietary Double Silicon Spider (DSS) technology, allows an ultra-linear piston action and provides full mechanical control across the entire working range. The 100mm (4 in) state-of-the-art voice-coil utilizing Interleaved Sandwich Voice coil (ISV) technology, provides high levels of thermal stability and durability. The ISV technology achieves a balanced linear motor unit exerting an exceptionally high force factor.

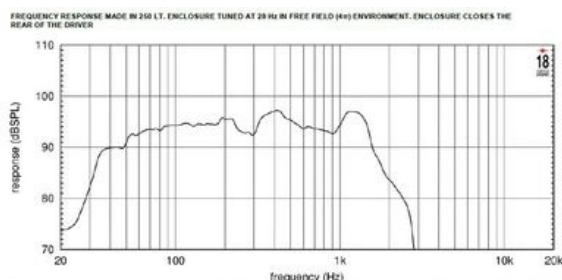

## SPECIFICATIONS

|  |                 |
|--|-----------------|
| Nominal Diameter                       | 533 mm ( in)    |
| Nominal Impedance                      | 4 Ω             |
| Minimum Impedance                      | 6.1 Ω           |
| Nominal Power Handling <sup>1</sup>    | 1600 W          |
| Continuous Power Handling <sup>2</sup> | 3200 W          |
| Sensitivity <sup>3</sup>               | 95.0 dB         |
| Frequency Range                        | 30 - 1000 Hz    |
| Voice Coil Diameter                    | 100 mm (4.0 in) |
| Winding Material                       | copper          |

## PARAMETERS<sup>4</sup>

|                     |   |
|---------------------|---|
| Resonance Frequency | 28 Hz   |
| Re                  | 4.9 Ω   |
| Qes                 | 0.47  |
| Qms                 | 15.7  |
| Qts                 | 0.46  |
| Vas                 | 310.0 dm <sup>3</sup> (10.95 ft <sup>3</sup> )  |
| Sd                  | 1660.0 cm <sup>2</sup> (257.3 in <sup>2</sup> ) |
| Xmax                | 14.0 mm   |
| Mms                 | 370.0 g   |
| Bl                  | 19.0 Txm  |
| Le                  | 1.6 mH  |
| EBP                 | 59 Hz   |

## DESIGN

|                        |  |
|------------------------|--|
| Surround Shape         | Triple roll                                    |
| Cone Shape             | Curvilinear                                    |
| Magnet Material        | Ferrite  |
| Woofers Cone Treatment | Weather protected                              |
| Recommended Enclosure  | 300.0 dm <sup>3</sup> (10.59 ft <sup>3</sup> ) |
| Recommended Tuning     | 32 Hz  |

## MOUNTING AND SHIPPING INFO

|                             |                                       |
|-----------------------------|---------------------------------------|
| Overall Diameter            | 545 mm (21.46 in)                     |
| Bolt Circle Diameter        | 520 mm (20.47 in)                     |
| Baffle Cutout Diameter      | 492.0 mm (19.37 in)                   |
| Depth                       | 252 mm (9.92 in)                      |
| Flange and Gasket Thickness | 18 mm (0.71 in)                       |
| Net Weight                  | 17.9 kg (39.46 lb)                    |
| Shipping Weight             | 19.4 kg (42.77 lb)                    |
| Shipping Box                | 570x570x290 mm (22.44x22.44x11.42 in) |

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.