

- 110 dB SPL 1W/ 1m average sensitivity 2 inch exit throat
- 3 inch aluminum edgewound voice coil
- 200 W program power handling
- Composite Titanium PEN diaphragm assembly
- Neodymium magnetic structure
- Excellent thermal exchange



The ND2060T 2-inch exit neodymium high frequency compression driver has been designed for high level sound systems application.

The diaphragm assembly is composed of a titanium dome sandwiched to a proprietary treated polyester suspension unit. It has been designed to maintain low resonance, lowering the minimum crossover point value at 1,2kHz. The diaphragm assembly is made by joining the former directly to the diaphragm on its upper bend edge. In comparison with a usual straight former joint, the driver's design assures extended frequency energy transfer for improved response linearity and unparalleled reliability. This feature facilitates proper motion control of the dome in real working conditions. A proprietary treated Nomex former is used as shows a 30% higher value of tensile elongation at a working operative temperature (200°C) when compared to Kapton. Moreover, this proprietary former material is also suitable for use in higher moisture content environments.

By careful use of elementary pieces of neodymium magnets, Eighteen Sound engineers have developed a powerful neodymium magnet assembly able to reach 19 KGauss in the gap in compact and lightweight structures. The motor structure, throughout the precisely coherent aluminum phase plug with 3 circumferential slots and the copper ring on the pole piece, reduces inductance effects and distortion. Four top plate air ducts have been designed to act as a loading chamber for the diaphragm, implementing mid band distortion and response figures.

The custom designed O-ring creates a tight seal between the plate and the cover assuring air chamber loading. Excellent heat dissipation and thermal exchange are guaranteed by the direct contact between the magnetic structure and the aluminum cover which leads to a lower power compression value.

A special treatment has been applied to the magnet and the top and back plates of the magnetic structure which make the driver more resistant to the corrosive effects of salts and oxidization.

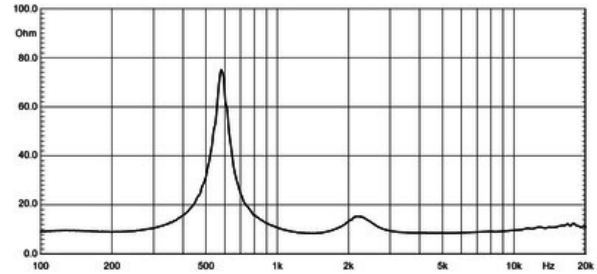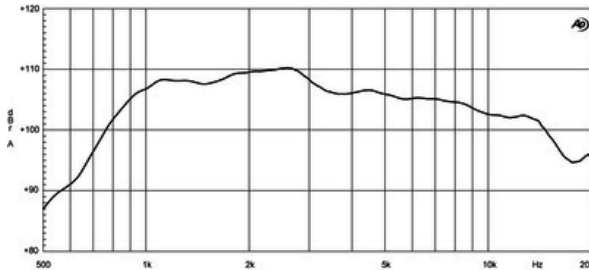

SPECIFICATIONS¹

| | |
|--|----------------|
| Throat Diameter | 51 mm (2.0 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 8.0 Ω |
| Nominal Power Handling ² | 100 W |
| Continuous Power Handling ³ | 200 W |
| Sensitivity ⁴ | 110.0 dB |
| Frequency Range | 0.5 - 20.0 kHz |
| Recommended Crossover ⁵ | 0.8 kHz |
| Voice Coil Diameter | 75 mm (3.0 in) |
| Winding Material | Aluminum |
| Diaphragm Material | Titanium - Pen |
| Magnet Material | Neodymium |

MOUNTING AND SHIPPING INFO

| | |
|------------------|------------------------------------|
| Overall Diameter | 132 mm (5.2 in) |
| Depth | 99 mm (3.9 in) |
| Net Weight | 3.2 kg (7.05 lb) |
| Shipping Weight | 3.5 kg (7.72 lb) |
| Shipping Box | 132x132x103 mm (5.20x5.20x4.06 in) |

1. Driver mounted on Eighteen Sound XR2064C horn
2. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated nominal impedance.
3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
5. 12 dB/oct. or higher slope high-pass filter.